

With ColorVu, You'll Enjoy:

Images shot by ColorVu camera were with supplementary light OFF

True Color Information

- Accurate color rendering
- Excellent performance in low-light environments



Unable to identify color




Accurate color

More Details

- Clearly captured color information
- Richer details compared to black and white imaging



Lost details

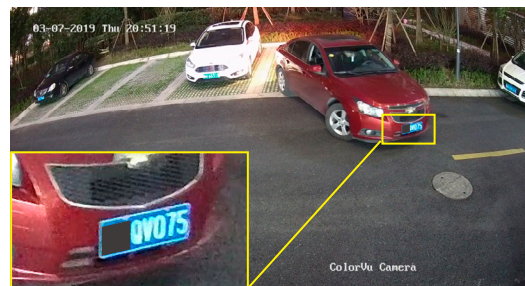


Rich color-related details

Better Visual Experience

- Balanced brightness
- F1.0 super aperture and advanced sensor guarantee realistic rendering



Blurry

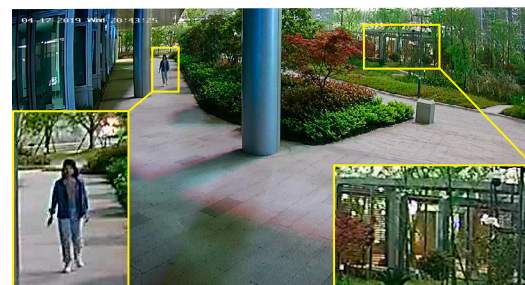

Sharp

24/7 Colorful Imaging

View in color, Even in darkness



Combining Great Technologies for Greater Image Quality

F1.0 Super Aperture

Collects more light to produce brighter image.

Friendly Lighting

Soft and warm supplemental light works to guarantee colorful images when in zero-light environments.

Advanced Sensor

Vastly improves the utilization of available light.

AcuSense NVR

DS-7732NXI-I4(/16P)/4S 32-Channel 4-HDD AcuSense NVR - Up to 32-ch IP cameras for access - Deep learning-based behavior analysis 4-ch false alarm reduction - Support quick target search - H.265/H.265+/H.264/H.264+/MPEG4 supported decoding formats 256 Mbps/200 Mbps for incoming/outgoing bandwidth 12-ch 1080p decoding 2 HDMI, 1 VGA and 1 CVBS output - eSATA by default - Optional 16 PoE ports, with /16P model 1.5U chassis	DS-7716NXI-I4(/16P)/4S 16-Channel 4-HDD AcuSense NVR - Up to 16-ch IP cameras for access - Deep learning-based behavior analysis 4-ch false alarm reduction - Support quick target search - H.265/H.265+/H.264/H.264+/MPEG4 supported decoding formats 256 Mbps/200 Mbps for incoming/outgoing bandwidth 12-ch 1080p decoding 2 HDMI, 1 VGA and 1 CVBS output - eSATA by default - Optional 16 PoE ports, with /16P model 1.5U chassis
DS-7616NXI-I2(/16P)/4S 16-Channel 2-HDD AcuSense NVR - Up to 16-ch IP cameras for access - Deep learning-based behavior analysis 4-ch false alarm reduction - Support quick target search - H.265/H.265+/H.264/H.264+/MPEG4 supported decoding formats 160 Mbps/256 Mbps for incoming/outgoing bandwidth 12-ch 1080p decoding 1 HDMI, 1 VGA and 1 CVBS output - Optional 16 PoE ports, with /16P model 1U chassis	DS-7608NXI-I2(/8P)/4S 8-Channel 2-HDD AcuSense NVR - Up to 8-ch IP cameras for access - Deep learning-based behavior analysis 4-ch false alarm reduction - Support quick target search - H.265/H.265+/H.264/H.264+/MPEG4 supported decoding formats 80 Mbps/256 Mbps for incoming/outgoing bandwidth 12-ch 1080p decoding 1 HDMI, 1 VGA and 1 CVBS output - Optional 8 PoE ports, with /8P model 1U chassis

ColorVu Camera

4 MP	DS-2CD204761-L 4 MP ColorVu Network Bullet Camera 4 MP resolution 2.8/4/6 mm fixed lens, optional - Colorful imaging 24/7 - H.265+/H.265 - IP 67 120 dB WDR	DS-2CD234761-L(U) 4 MP ColorVu Network Turret Camera 4 MP resolution 2.8/4/6 mm fixed lens, optional - Colorful imaging 24/7 - H.265+/H.265 - IP67/IP66(-U) 120 dB WDR -U: build-in microphone	DS-2CD2T4761-L 4 MP ColorVu Network Bullet Camera 4 MP resolution 2.8/4/6 mm fixed lens, optional - Colorful imaging 24/7 - H.265+/H.265 - IP 67 120 dB WDR
	DS-2CD202761-L 2 MP ColorVu Network Bullet Camera 2 MP resolution 2.8/4/6 mm fixed lens, optional - Colorful imaging 24/7 - H.265+/H.265 - IP 67 120 dB WDR	DS-2CD232761-L(U) 2 MP ColorVu Network Turret Camera 2 MP resolution 2.8/4/6 mm fixed lens, optional - Colorful imaging 24/7 - H.265+/H.265 - IP67/IP66(-U) 120 dB WDR -U: build-in microphone	DS-2CD2T2761-L 2 MP ColorVu Network Bullet Camera 2 MP resolution 2.8/4/6 mm fixed lens, optional - Colorful imaging 24/7 - H.265+/H.265 - IP 67 120 dB WDR

NVR

DS-7732NI-I4/24P 32-Channel 4-HDD NVR - Up to 32-ch IP cameras for access - H.265/H.265+/H.264/H.264+/MPEG4 supported decoding formats 320 Mbps/256 Mbps for incoming/outgoing bandwidth 16-ch 1080p decoding 2 HDMI, 1 VGA and 1 CVBS output - eSATA by default 24 PoE ports 1.5U chassis	DS-7732NI-I4(/16P)(B) 32-Channel 4-HDD NVR - Up to 32-ch IP cameras for access - H.265/H.265+/H.264/H.264+/MPEG4 supported decoding formats 256 Mbps/256 Mbps for incoming/outgoing bandwidth 16-ch 1080p decoding 2 HDMI, 1 VGA and 1 CVBS output - eSATA by default - Optional 16 PoE ports, with /16P model 1.5U chassis	DS-7716NI-I4(/16P)(B) 16-Channel 4-HDD NVR - Up to 16-ch IP cameras for access - H.265/H.265+/H.264/H.264+/MPEG4 supported decoding formats 160 Mbps/256 Mbps for incoming/outgoing bandwidth 16-ch 1080p decoding 2 HDMI, 1 VGA and 1 CVBS output - eSATA by default - Optional 16 PoE ports, with /16P model 1.5U chassis
---	--	--

DS-7616NI-I2(/16P) 16-Channel 2-HDD NVR - Up to 16-ch IP cameras for acces - H.265/H.265+/H.264/H.264+/MPEG4 supported decoding format 160 Mbps/256 Mbps for incoming/outgoing bandwidth 16-ch 1080p decoding 1 HDMI, 1 VGA and 1 CVBS output - Optional 16 PoE ports, with /16P model 1U chassis	DS-7608NI-I2(/8P) 8-Channel 2-HDD NVR - Up to 8-ch IP cameras for acces - H.265/H.265+/H.264/H.264+/MPEG4 supported decoding format 80 Mbps/256 Mbps for incoming/outgoing bandwidth 16-ch 1080p decoding 1 HDMI, 1 VGA and 1 CVBS output - Optional 8 PoE ports, with /8P model 1U chassis
---	---