



A3 Monochrome Multifunctional Printers (MFP)

750i/650i/550i/450i/360i/300i



TOMORROW'S WORKPLACE TODAY A NEW WAY OF WORKING HAS ARRIVED

i-series SIMPLIFYING WORK


The User Interface has been completely revamped with an operation panel screen with smart-device-style operability. Operation has been simplified by narrowing down functions and screen transitions to frequently-used functions.

Easy-to-use, new operation panel design

The operation panel features a new simple GUI (Graphical User Interface) design. Features including no hard keys and panel vibration feedback reflect familiar smart devices and enable easy use of a variety of IT services. Simplicity of operation has been achieved by concentrating on frequently-used functions to minimise functions and screen transitions.

GUI operation panel with a choice of two panel styles

The user can switch between two panel styles as required: the new GUI Basic Style characterised by simple operation, and the conventional Classic Style utilising advanced settings and functions. Basic Style also offers an intuitive Simple Copy screen.

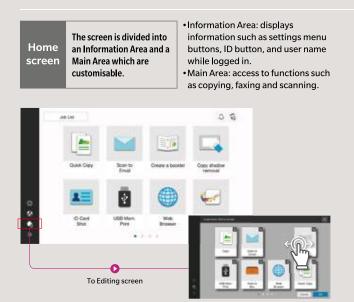

Quick Copy screen screen transitions Large buttons allow easy browsing and intuitive operation.
Options are displayed in a list and

big hub no

can be changed with just one touch.



Delivering Simple, Secure and Convenient office work. We innovate your business, processes and way of working.

SIMPLE

Simplifying work

The operation panel design has been updated to reflect familiar smart device operation. It offers the user a smarter way of working.

SECURE

Thoroughly protecting office information

Improved security of large-volume office data, and paper documents, significantly reduces the burden on IT managers.

SUSTAINABLE

Always at the forefront

Our remote services support governance and resolve executive concerns and issues.

Large, user-friendly, 10.1-inch touch panel

The 10.1-inch panel has been newly developed from the customer's perspective. It delivers better legibility and ease of operation for enhanced work efficiency. The multi-touch feature enables smooth, intuitive, tablet-like operation.



Make tasks simple with purpose-specific apps

The 750i series simplifies operation with on-screen animated instructions that guide users through tasks. Operations can be performed smoothly in just a few easy steps.

Adjustable tilt operation panel

The operation panel can be freely tilted to a maximum of 90 degrees to suit individual users.



Indicator lights

The 750i series has been installed with new LED lights that gently harmonise with the office environment. The LEDs are located on the front of the MFP. The data light indicates data receipt or accumulation, and the print light reminds users to collect documents from the output tray.



i-SERIES THOROUGH **PROTECTION OF OFFICE INFORMATION**

Data security is an ongoing concern in the corporate world. Itec works tirelessly to keep clients' documents secure, in both digital and paper formats. By including cutting edge security functions in all our technologies, we aim to reduce the burden on IT administrators.



SECURE services


Data protection is a major issue for most companies. We deliver advanced security settings through Itec's SECURE services, a total security setting service that provides greater protection for customer data stored in the SSD and device's network settings.

Encrypted SSD

The 750i series is equipped with a new 256 GB encrypted SSD for heightened security. With very few device compatibility problems, and with full-time encryption, this constantly maintains a high level of security with no fuss.

Secure printing

By setting a password for documents on the printer driver screen, the document is stored on the unit's SSD until the same password is input into the MFP's operation panel. The document is protected and will not be output until the password set for that document is matched. This is useful when you wish to print confidential documents or give permission for limited users to receive copies.



Use PC login user names for easy secure printing

The PC login profile can be used as an ID for secure printing, so the user can print easily and securely once logged in without the trouble of entering his or her ID each time.

Various types of user authentication

Optimal authentication systems can be customised to suit office scale and pre-existing systems. The 750i series also supports single sign-on (SSO) which enhances operability without sacrificing security.

Main unit authentication

Authentication can be performed through the device alone. It is also possible to set detailed usage restrictions for functions, including copy, print, scan and fax*.

*Requires Fax Kit FK-514 option.

Non-contact IC card authentication

Non-contact IC cards^{*1} such as FeliCa can be used to authenticate users*2. This also supports SSFC (Shared Security Formats Cooperation) specifications which enable integration of staff authentication with authentication systems. Apart from non-contact IC cards, authentication can also be carried out on NFC-compatible Android devices*3.



- *1 Non-contact IC cards are compatible with FeliCa (IDm), SSFC, FCF, FCF (Campus) and MIFARE (UID).
- *2 Requires the IC card authentication device option.
- *3 Requires an Android device later than Android 4.4, compatible with HCE (Post Card Emulation), and Mobile Print.

Print light for completed outputs

A white LED print light, which shows the printing status, has been added. It lights up when printing is completed to remind the user to collect the printed materials, thus minimising the risk of information leaks.




Virus scanning



The 750i series can be equipped with robust antivirus software based on

an embedded Bitdefender scan engine to ensure safe connection to devices including PCs, tablets, and USB flash drives. Scanning individual files means much finer virus detection than with the whitelist method alone. Latent viruses in the office are discovered through checking and notification when files are input. Checking when files are output from the MFP also prevents dissemination of infected files. Further periodic checking of files in the MFP discovers risky files and detects latent risks in the MFP. Real time virus scan jobs are available for print, scan and fax functions, while manual or scheduled virus scans are possible for folders such as SMB folders on the Box and SSD.

Requires i-Option LK-116. Requires an internet environment.



Supports VLAN (Virtual LAN)

The 750i series supports a VLAN function that splits multiple networks logically. Data can be isolated for each network, such as externally vs. internally connected networks, company dedicated vs. guest-only networks, or in shared offices so the device can be used securely.

* For further details please contact your authorised Itec Representative.

Security watermark function

In addition to the Copy Protect Function, Copy Guard and Password Copy functions for high-level security are available with 750i series. Printing with a special security watermark embedded into the original prevents unauthorised secondary copying or leakage of confidential documents to third parties.

Encrypted PDFs

Password encryption

Documents distributed in PDF format can be password encrypted.

Digital ID encryption

Only authorised recipients with a private key can decrypt. This ensures a far more robust level of security than the previous public key system. If encrypting with Digital ID, the email address (S/MIME send) to which the Digital ID has already been registered must be registered to the MFP's abbreviated address. Requires the i-Option LK-102 v3.

• Electronic signatures

Electronic signatures certify (MFP) document authors, and also guarantee that the document has not been changed and is valid. Certifications by third party organisations can also be used. When using electronic signatures, files should be encrypted using either a password or Digital ID.

Recognised high-level security ISO/IEC 15408 certification

To objectively prove the reliability of Itec MFP security functions, we have obtained the Common Criteria (CC) for Information Technology Security Evaluation (ISO/IEC 15408). For the 750i series, we plan to obtain CC certification for compliance with HCD-PP v1.0 (Protection Profile for Hardcopy Devices).

Information security-related certification obtained for this product (and this system) demonstrates compliance with certification requirements as a result of evaluations based on specified evaluation standards and methods, but does not assure that the product (or the system) is completely without weaknesses.

Other major security features

 $\bullet \mathsf{SMTP}\ authentication/\mathsf{POP}\ before\ \mathsf{SMTP}\ authentication\ enable\ security\ to$

be set when sending emails.


- •SSL/TLS protocol enables encryption of data transmission between networks
- Storage Lock Password prevents unauthorised access to the SSD • TPM (Trusted Platform Module) safely manages confidential information* Requires i-option LK-115 v2

i-SERIES ALWAYS AT THE FOREFRONT

Itec remotely manages operating conditions and toner levels.

Worldwide Remote Service Platform

We developed new services leveraging IoT so users can focus on their core business. i-Series intelligently collects data for self-diagnostic and remote maintenance, as well as predicts the optimum replacement time for parts and consumables to minimise downtime.

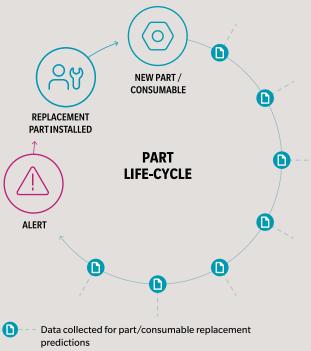

For more information, please contact your authorised Itec Representative.

Connectors

The operation panel connects to various cloud services^{*1} and corporate internal server SharePoint 2007/2010/2013/2016^{*1}, enabling connectivity for scan data uploads or direct printing. After logging in to the device, users can also automatically log in under silent mode by entering and saving authentication information to services such as the cloud.

*1. Additional charges apply



MarketPlace

MarketPlace connects you to a variety of applications that can be installed to tailor the functionality of your MFP. Browse through the many available options to find applications that answer your business needs.



HIGH PRODUCTIVITY

Reduce downtime and boost productivity with a wide range of paper feed options and a sensor that detects paper type.

Intelligent Media Sensor*

The 750i series automatically detects paper types, including paper weight and envelopes. Optimal toner adjustment and feeding of a diverse range of paper enables optimal high-quality printing. * Optional Media Sensor, IM-102 is required



Paper feed cabinet for different paper sizes

PC-417* includes two large capacity paper cassettes which allow paper from one cassette to be fed to the main unit for printing while paper can be refilled into the other cassette. This means there's no need to interrupt printing to replenish paper. The cabinet supports frequently used A4 and B5 paper. * PC-417 is standard for 750i and optional for 650i/550i/450i/360i/300i.

Manual stapling supported finisher

The manual stapling function in the finisher lets the user quickly re-staple an original document that had its staple removed for copying, or when he or she forgets to choose a staple setting when printing.

Optional finisher FS-539 or FS-539SD or FS-540 or FS-540SD is required.

in-house production of a variety of outputs and finishes.

when discharged

Corner stapling

Slightly offsets position of each set of pages

Corner stapling

Multifunctional finisher

750i / 650i

550i / 450i

360i / 300i

Corner

Finishing Functionalities

Compatible

Offset sorting

Finisher Models

(Shift sort) function

Stapling functions

Models


Depending on the objective, users can select from several types of finish that are automatically processed by the multifunctional finisher, including booklet making, tri-folding, stapling and hole-punching. In addition to high-speed output, this function allows

Two-point stapling

A wide range of paper feed options

Supports 1,150 sheets paper capacity with standard paper trays and manual bypass tray. Installing optional paper feed cassettes^{*1} increases paper capacity to 3,650 sheets. Further installing a large capacity unit escalates maximum paper capacity to 6,650 sheets^{*2}.

*1 Standard for 750i.

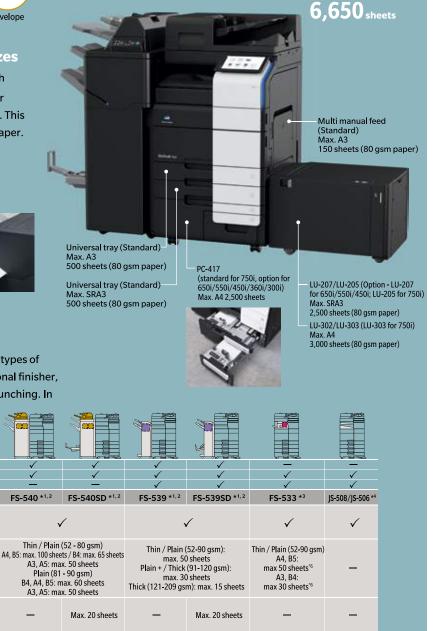

stapling (side) (parallel) A3, A5: max, 50 sheets Booklet function & Tri-fold Saddle stitching \square Centre-fold (up to 3 sheets) folding functions Z folding unit ZU-609 📜 52-90 gsm Ch Z folding function Z folding Punch kit PK-519 🧮 Punch kit Punch kit Upper two-hole Two-hole punch Hole-punching PK-526 PK-524 punch Up to 300 gsm Up to 300 gsm Up to 157 gsm Cover sheet & Insert Post Inserter PI-507 🛩 Standard Cover Sheet Standard functions Standard functions Insert sheet sheet or standard functions functions

1 Installation of a finisher enables in-body paper discharge. A maximum of three discharge locations can be set. For FS-540 and FS-5405D, a maximum of four in-body paper discharges can be set with job Separator jS-602 installed. 12 7501 requires Reby Transport Unit RU-519, and 650//550//550//5001/2001 require Reby Transport Unit RU-513 to be installed. 13 FS-533 requires MK-607 to be installed for 550//4501. 14 5008 is for 5500/4501. [S-506 is optional for 3600/300]. 15 FS-540/FS-5500/FS-530/FS-530 paralles tabling is only supported for A3, A4 point, A4 Advance, B5 portrait and A5 landscape cirentations. However, manual setting is required for A3 and A advance.

7


COPY / PRINT

Speed up work with a shorter warm-up time

	750i	650i	550i	450i	360i	300i
Warm-up time (until ready to copy) Main power ON > Start button ON	18 sec or less	15 sec or less	14 sec or less	15 sec or less	12 sec or less	11 sec or less
First copy time (Monochrome) Start button ON > First sheet output	2.8 sec		3.3 sec	3.8 sec	4.6 sec	5.0 sec
Panel recovery time	Approx. 1.5 sec					

Copy both sides of an ID card onto one sheet with Card Shot function

When copying both sides of an irregular-sized original, such as a license or business card, the front and back sides of the card can be automatically arranged to be printed on the same side of one sheet. Easy copying is possible by selecting the Card Shot app on the User Interface.



Reduce toner consumption with the Non-Image Area Erase function

When copying with the cover open, such as for thick books, the original is automatically detected and the shadowy area around the original is omitted. This saves excess toner consumption. Easy operation is possible by selecting the relevant apps on the User Interface.



Lightweight paper trays

Paper trays handle easily and open/close smoothly with a light press and pull motion. Trays can be removed for retrieval of jammed paper, which equates to less downtime.



Use irregular-sized paper such as postcards and envelopes with paper feed and manual feed trays

Both standard paper trays on the 750i series are capable of handling irregular-sized paper, enabling set-up of a wider range of paper. Paper tray 1 has capacity for up to 200 postcards or 70 envelopes for more efficient printing. The 750i series is ideal for offices where space is limited.

Paper Size Measurement function

This function automatically measures irregular-sized paper placed on the platen glass and document feeder. The size of the measured paper can also be registered in the devices memory. This is useful for offices that handle irregular paper sizes like slips and vouchers.

Only 750i/650i/550i/450i supports measurements from the document feeder.

Enhanced 1,200 dpi resolution

The 750i series achieves a 1,200-dpi print resolution with superb ability to reproduce small font sizes and fine lines. Such faithful reproduction capability improves document legibility and produces beautiful, high-quality print-outs. Slows down printing speed.

Print banners up to 1,200 mm with banner printing

Using the optional Banner Paper Guide enables banner printing up to 1,200 mm. 750i series also supports 90 mm narrow paper so various sized POPs and banners can be created for a wide range of purposes. Installation of the MK-730 Banner Paper Guide option is recommended.

Print websites displayed on the operation panel with web browser browse and print

The 750i series supports a web browser function. Websites can be displayed on the operation panel and printed out. Pages in PDF files on the website can be specified and only the required sections printed.



Print directly from your USB flash drive

The 750i series is equiped with a USB port, located on the side of the operation panel. After inserting a USB flash drive, printing procedures pop up in the touch screen, and the

flash drive data can be directly printed or saved to a Box in the unit in a few easy steps.

May not operate correctly depending on the type of USB flash drive. Supported file formats: PDF, compact PDF, JPEG, TIFF, XPS, compact XPS, and OOXML (.docx/.xlsx/.pptx). Printing results may differ from the image on the PC screen. Virus check function requires i-Option LK-116.

Email RX Print

Files can be easily printed out by attaching them to an email and sending it to the machine's email address.

Supported file formats: PDF, Compact PDF, JPEG, TIFF, XPS, Compact XPS, and OOXML (.docx/.xlsx/.pptx). Requires i-Option LK-110 v2.





Offers a new workstyle through advanced connectivity with mobile devices.

Mobile communications function

Connectivity with NFC-equipped Android devices

The operation panel has a mobile touch area compatible with NFC-equipped devices. Installing Mobile Print on Android devices allows that device to be registered. Just holding the Android device over the mobile touch area enables the selected file to be printed. Scanned documents can also be scanned and saved to Android devices or cloud storage. Where user authentication is enabled, just holding the Android device nearby allows log in. Requires the Android device to be equipped with OS4.4 or later. Requires a wireless LAN environment.

Bluetooth LE connectivity with iOS devices

Using Bluetooth LE (low energy), the device close to the user can be searched and registered with Mobile Print. As it is also supported with the iOS action button, printing and scan data sharing from various applications can be smoothly executed. Further, where user authentication is enabled, Bluetooth LE can be used to log in.

Requires the device connection I/F kit EK-609 option. Requires wireless LAN environment.

Create a wireless environment easily with wireless LAN/AP mode

The 750i series supports Simple Access Point (AP) Mode*, which easily creates a local wireless LAN environment with only the bizhub allowing a wireless LAN to be built separately from the company LAN. Because it bypasses the company LAN, even mobile devices brought in from outside can be securely connected

*Requires Upgrade Kit UK-221 option.



Supporting a range of print services

Mobile Print

With a simple and intuitive user interface. Connecting a mobile device allows fast, secure scan data acquisition, saving to and sharing cloud storage, as well as document and image printing. Authentication Print and Secure Print are also supported enabling worry-free printing of confidential documents.







The Scan functions deliver high performance and high functionality from speed, quality and distribution to storage.



Outstanding scan performance

A Dual Scan Document Feeder (DSDF) with automatic duplex, simultaneous scanning achieves high-speed scanning. A large number of sheets can be set at any one time, significantly reducing scanning time and effort. The precision of automatic skew correction, which adjusts the angle of the scanned original, has been greatly improved to deliver highly accurate scanning with less skew.

	750i/650i/550i/450i	360i/300i
DSDF	Standard	Option DF-714
Scanning speed	140 sides / min (280 sides / min for duplex)	100 sides / min (200 sides / min for duplex)
Paper capacity	300 sheets	100 sheets

Double feed detection sensor

Applying ultrasonic waves to the original distinguishes a layer of air between each page and detects double feeds. When a double feed is detected, a preview of the original that has already been scanned will be displayed so that the job can be restarted without repeating the whole scanning operation from the beginning.

When equipped with the optional DSDF DF-714 for 360i/300i.

Send scan data instantly to your own email address with "Scan (email to me)"

Users can send scan data such as receipts and payment slips to themselves immediately. This can also be done securely with the authentication setting. As the "Scan (email to me)" button is on the home screen, the data can be scanned and sent quickly in a few easy steps.





Exclude blank documents from being scanned with blank original removal function

Blank sheets from original documents set on the ADF can be excluded from scanning. Documents detected as blank sheets will not be counted as a page.

Digitisation of paper documents

Documents can be scanned and converted to PDF or OOXML format files. File format can be selected according to the business and intended use, which broadens the scope of secondary use.

Scan to PDF / Scan to OOXML image (with LK-110 v2 installed)



Applying OCR to a document produces searchable text

• Microsoft Office etc. enables reuse of images and text.

File conversion formats and required options (i-Option)


	LK-102 v3	LK-105 v4	LK-110 v2
PDF/A (long-term archiving)	√		✓
Web-optimised PDF (linearised PDF)	√		\checkmark
Encrypted PDF (digital ID)	√		\checkmark
Searchable PDF (OCR)		✓	\checkmark
OOXML file			√*1
(extension: docx/.xlsx/.pptx) conversion			✓ ⁻¹
OOXML file		(12)	✓
(extension: docx/.xlsx/.pptx) conversion +OCR		√ ~2	

*1 pptx conversion is a standard function, but the OCR function requires either LK-105 v4 or LK-110 v2.

*2 Only compatible with pptx.

Improve scan job efficiency

Scanned originals can be converted to a variety of document formats according to the application and stored in the device box or a USB flash drive. They can also be sent and stored to a PC or server via email, SMB, FTP, or Web DAV.



Requires i-Option LK-110 v2

11

DELIVERING SIMPLE, SECURE AND CONVENIENT WORKFLOWS

1900a -

360i/300i

OPTION DESCRIPTIONS

ENHANCED FEATURES

LK-102v3 PDF enhancements	PDF/A (1b); PDF encryption; digital signature
LK-104v3 Voice guidance	Supports voice guidance
LK-105v4 OCR text recognition	Searchable PDF and PPTX
LK-106 Barcode fonts	Supports native barcode printing
LK-107 Unicode fonts	Supports native Unicode printing
LK-108 OCR A and B fonts	Supports native OCR A and B font printing
LK-110v2 Document converter pack	Generates various file formats incl. DOCX; XLSX and PDF/A
LK-111 ThinPrint [®] Client	Print data compression for reduced network impact
LK-115v2 TPM activation	Trusted Platform Module for protection of data
	encryption and decryption
LK-116 Antivirus	Bitdefender [®] Antivirus provides real time scanning
	of all incoming/outcoming data
LK-117 T.38 IP fax	Fax over IP networks (T.38), requires fax kit

CONNECTIVITY

FK-514 Fax board	Super G3 fax, digital fax functionality	
UK-221 Wireless LAN	Wireless LAN and wireless LAN Access Point Mode	
EK-608 USB I/F kit	USB keyboard connection	
EK-609 USB I/F kit	USB keyboard connection; Bluetooth	
ID card reader	Various ID card technologies	
MK-735 Mount kit	Installation kit for ID card reader	

OTHERS	
DF-632 Document feeder	Reversing automatic document feeder, capacity 100 originals
DF-714 Document feeder	Dual scan document feeder, capacity 100 originals
WT-506 Working table	Authentication device placement
KP-102 10-Key pad	For use instead of touchscreen
IM-102 Intelligent Media Sensor	For detecting types of media
SC-509 Security kit	Copy guard function / password copy
EM-908 Replacement SSD	1TB SSD to increase storage space
KH-102 Keyboard holder	To place USB keyboard
CU-102 Air cleaning unit	Improving indoor air quality by reduced emissions
MEDIA INPUT	
PC-216 Paper feed cabinet	2x 500 sheets, A5-A3, 52-256 g/m ²
PC-416 Paper feed cabinet	2,500 sheets, A4, 52-256 g/m ²
PC-417 Paper feed cabinet	1,500 + 1,000 sheets, A5-A4, 52-256 g/m ²
LU-302 Large capacity unit	3,000 sheets, A4, 52-256 g/m ²
MK-730 Banner paper guide	Banner paper feeding
DK-516 Desk	Provides storage space for print media and other materials
DK-705 Low Caster Desk	Caster table
MEDIA OUTPUT	
FS-533 Inner finisher	50-sheet stapling, 500 sheets max. output
PK-519 Punch kit for FS-533	Jo-sheet stapling, Job sheets max. output
	2/4 hole punching, autoswitching
FS-539/SD Staple finisher	2/4 hole punching, autoswitching
FS-539/SD Staple finisher	2/4 hole punching, autoswitching
FS-539/SD Staple finisher FS-539SD Booklet finisher	2/4 hole punching, autoswitching 50-sheets stapling or 48 sheets +2 coversheets (up to 209g/m ²
	2/4 hole punching, autoswitching 50-sheets stapling or 48 sheets +2 coversheets (up to 209g/m ² 3,200 sheets max output

2/4 hole punching; autoswitching

For FS-539/SD installation

Separation of fax output; etc.

PK-524 Punch kit for FS-539/SD

RU-513 Relay unit

JS-506 Job separator

TECHNICAL SPECIFICATIONS

System speed A4	Up to 36 ppm / up to 30 ppm
360i, 300i	
Autoduplex speed A4	Up to 36 ppm / up to 30 ppm
360i, 300i	
1st page out time A4	within 4.6 sec / within 5.0 sec
360i, 300i	
Warm-up time*1	within 12 sec / within 11 sec
360i, 300i	
Imaging technology	Laser
Panel size/resolution	10.1" / 1024 x 600
System memory	8GB
System storage (standard/optional)	256 GB SSD / 1TB SSD
Interface	10/100/1,000-Base-T Ethernet; USB 2.0;
	Wi-Fi 802.11 b/g/n (optional)
Network protocols	TCP/IP (IPv4/IPv6); SMB; LPD; IPP; SNMP;
	HTTP(S); Bonjour
Automatic document feeder (optional)	Up to 100 originals; A6-A3; 35-163 g/m ² ;
	DF-632 RADF
	DF-714 DSDF
Paper input capacity (standard/max)	1,150 sheets / 6,650 sheets
Paper tray input	1x 500 sheets; A6-A3; custom sizes; 52-256 g/m ²
	1x 500 sheets; A5–SRA3; custom sizes; 52–256 g/m^2
Paper tray input (optional)	PC-216 2x 500 sheets; A5-A3; 52-256 g/m ²
	PC-416 1x 2,500 sheets; A4; 52-256 g/m ²
	PC-417 1x 1,500 + 1x 1,000 sheets; A5-A4; 52-256 g/m ²

· · · · · · ·		
Large capacity unit (optional)	LU-302 1x 3,000 sheets; A4; 52-256 g/m ²	
Manual bypass	150 sheets; A6–SRA3; Custom sizes; Banner; 60–300 g/m ²	
Automatic duplexing	A5-SRA3; 52-256 g/m ²	
Output capacity	Max. 250 sheets	
Finishing modes (optional)	Offset; Group; Sort; Staple; Punch; Half-fold; Tri-fold; Booklet	
Power consumption	220-240 V / 50/60 Hz; Less than 1.58 kW	
System dimension (W x D x H)	615 x 688 x 779 mm (without options)	
	615 x 688 x 1165 (with DF-714, PC-416)	
System weight	Approx. 76 kg (without options)	
	Approx. 112 kg (with DF-714, PC-416)	
PRINTER SPECIFICATIONS		
Print resolution	1,800 (equivalent) x 600 dpi; 1200 x 1200 dpi	
Print Speed A4	Up to 36ppm , up to 30ppm	
360i, 300i		
Page description language	PCL 6 (XL3.0); PCL 5c; PostScript 3 (CPSI 3016); XPS	
Operating System	Windows 7 (32/64); Windows 8/8.1 (32/64); Windows 10	
	(32/64);	
	Windows Server 2008 (32/64); Windows Server 2008 R2;	
	Windows Server 2012; Windows Server 2012 R2;	
	Windows Server 2016; Windows Server 2019;	
	Macintosh OS X 10.10 or later; Unix; Linux; Citrix	
Printer fonts	80 PCL Latin; 137 PostScript 3 Emulation Latin	
Mobile printing	AirPrint (iOS); Mopria (Android);	
	Mobile Print (iOS/Android/Windows 10 Mobile); Mobile	
	Authentication and Pairing (iOS/Android)	
	WiFi Direct	

360i/300i

TECHNICAL SPECIFICATIONS

SCANNER SPECIFICATIONS

Scan speed (mono/colour)	DF-714 300dpi simplex 80/80 ipm, 300dpi duplex 160/160 ipm 200dpi simplex 100/100 ipm, 200dpi duplex 200/200 ipm		
	DF-632 300dpi simplex 80/80 ipm , 300dpi duplex 37/37 ipm		
Scan modes	Scan-to-email (Scan-to-Me); Scan-to-SMB (Scan-to-Home);		
	Scan-to-FTP; Scan-to-Box; Scan-to-USB; Scan-to-WebDAV;		
	Scan-to-URL; TWAIN scan		
File formats	JPEG; TIFF; PDF; Compact PDF; Encrypted PDF;		
	XPS; Compact XPS; PPTX		
	Optional: Searchable PDF; PDF/A 1a and 1b;		
	Searchable DOCX/PPTX/XLSX		
Scan destinations	2,000 destinations + 100 groups; LDAP support		

COPIER SPECIFICATIONS

Copy resolution	600 x 600 dpi
Gradation	256 gradations
Multicopy	1-9,999
Original format	A6-A3; Custom sizes
Magnification	25-400% in 0.1% steps; Auto-zooming

FAX SPECIFICATIONS

Fax standard	Super G3 (optional)	
Fax transmission	Analogue; i-Fax; Colour i-Fax; IP-Fax	
Fax resolution	Up to 600 x 600 dpi	
Fax compression	MH; MR; MMR; JBIG	
Fax modem	Up to 33.6 Kbps	
Fax destinations	2,000 destinations + 100 groups	

USER BOX SPECIFICATIONS

Storable documents	Up to 3,000 documents or 10,000 pages Public; Personal (with password or authentication);	
Type of user boxes		
	Group (with authentication)	
Type of system boxes	Secure print; Encrypted PDF print; Fax receipt; Fax polling	

SYSTEM FEATURES

STSTEIMTERIORES	
Security Functions	ISO 15408 HCD-PP Common Criteria (in evaluation); IP filtering
	and port blocking; SSL3 and TLS1.0/1.1/1.2 network
	communication; IPsec support; IEEE 802.1x support;
	User authentication; Authentication log; Secure print; Kerberos;
	Data encryption (AES 256); Memory data auto deletion; Confi-
	dential fax; Print user data encryption
Security Functions (optional)	Antivirus realtime scanning (Bitdefender®);
	Copy protection (Copy Guard, Password Copy)
Accounting	Up to 1,000 user accounts; Active Directory support (user name +
	password + e-mail + SMB folder); User function access definition;
	Authentication by mobile device (Android)
Accounting Functions (optional)	ID card authentication (ID card reader);
	Authentication by mobile device (iOS)
Software	Net Care Device Manager; Data Administrator; Box Operator;
	Web Connection, Print Status Notifier; Driver Packaging Utility;
	Log Management Utility

¹ Warm-up time may vary depending on the operating environment and usage

- All specifications refer to A4-size paper of 80 g/m² quality.
 The support and availability of the listed specifications and functionalities varies depending on operating systems, applications
- and network protocols as well as network and system configurations.
 The stated life expectancy of each consumable is based on specific operating conditions such as page coverage for a particular page size (6% coverage of A4). The actual life of each consumable will vary depending on use and other printing variables including page coverage, page size, media type, continuous or intermittent printing, ambient temperature and humidity. Some of the product illustrations contain optional accessories.
- Specifications and accessories are based on the information available at the time of printing and are subject to change without notice.
- All information stated in the brochure is correct at time of printing and subject to change without notice. All brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged.

650i/550i/450i

OPTION DESCRIPTIONS

ENHANCED FEATURES

LK-102v3 PDF enhancements	PDF/A(1b), PDF encryption, digital signature
LK-104v3 Voice guidance	Supports voice guidance
LK-105v4 OCR text recognition	Searchable PDF and PPTX
LK-106 Barcode fonts	Supports native barcode printing
LK-107 Unicode fonts	Supports native Unicode printing
LK-108 OCR A and B fonts	Supports native OCR A and B font printing
LK-110v2 Document converter pack	Generates various file formats incl. DOCX, XLSX and PDF/A
LK-111 ThinPrint [®] client	Print data compression for reduced network impact
LK-115v2 Trusted Platform Module	Trusted Platform Module for protection of data encryption and
	decryption
LK-116 Antivirus	Bitdefender [®] antivirus provides real time scanning of all
	incoming and outgoing data
LK-117 T.38 IP fax	Fax over IP networks (T.38), requires fax kit

CONNECTIVITY

CONNECTIVITI	
FK-514 Fax board	Super G3 fax, digital fax functionality
UK-221 Wireless LAN	Wireless LAN and wireless LAN Access Point Mode
EK-608 USB I/F kit	USB keyboard connection
EK-609 USB I/F kit	USB keyboard connection; Bluetooth
ID card reader	Various ID card technologies
MK-735 Mount kit	Installation kit for ID card reader

OTHERS

WT-506 Working table	Authentication device placement
KP-102 10-Key pad	For use instead of touchscreen
IM-102 Intelligent Media Sensor	For detecting types of media
SC-509 Security Kit	Copy guard function / password copy
EM-908 Replacement SSD	1 TB SSD to increase storage space
KH-102 Keyboard holder	To place USB keyboard
CU-102 Air Cleaning Unit	Improving indoor air quality by reduced emission

MEDIA INPUT PC-216 2x Paper feed cabinet 2x 500 sheets, A5–A3, 52–256 g/m² $\,$ PC-416 Paper feed cabinet 2,500 sheets, A4, 52-256 g/m² PC-417 Paper feed cabinet 1,500 + 1,000 sheets, A5–A4, 52–256 g/m^2 LU-302 Large capacity unit 3,000 sheets, A4, 52-256 g/m² LU-207 Large capacity unit 2,500 sheets, A4–SRA3, 52–256 g/m^{2} MK-730 Banner paper guide Banner paper feeding DK-516 Desk Provides storage space for print media and other materials DK-705 Low Caster Desk Caster table

MEDIA OUTPUT

OT-513 Output tray	Output tray used instead of finisher
JS-508 Job separator ^{*1}	Separation of fax output; etc.
FS-533 Inner finisher⁺1	50-sheet stapling, 500 sheets max. output
MK-607 Fan kit ^{*1}	For FS-533 ventilation
PK-519 Punch kit for FS-533 ^{*1}	2/4 hole punching, autoswitching
FS-539 Staple finisher	50 sheets stapling; 3,200 sheets max. output
FS-539SD Booklet finisher	50 sheets stapling; 20 sheets booklet finisher;
	2,200 sheets max. output
PK-524 Punch kit for FS-539/SD	2/4 hole punching; autoswitching
FS-540 Staple finisher	100 sheets stapling; 3,200 sheets max. output
FS-540SD Booklet finisher	100 sheets stapling; 20 sheets booklet finisher;
	2,700 sheets max. output
PK-526 Punch kit for FS-540/SD	2/4 hole punching; autoswitching
RU-513 Relay unit	For FS-539/SD or FS-540/SD installation
JS-602 Job separator for FS-540/SD	Separation of fax output; etc.
PI-507 Post inserter for FS-540/SD	Cover insertion; post finishing
ZU-609 Z-fold unit for FS-540/SD	Z-fold for A3, B4 or Legal prints

TECHNICAL SPECIFICATIONS

SYSTEM SPECIFICATIONS

STSTEIN SPECIFICATIONS	
System speed A4	up to 65ppm, up to 55ppm, up to 45ppm
650i, 550i, 450i	
System speed A3	Up to 32ppm, up to 32ppm, up to 15ppm
650i, 550i, 450i	
Autoduplex speed A4	up to 65 ppm, up to 55ppm, up to 45 ppm
650i, 550i, 450i	
1st page out time A4	2.8sec, 3.3 sec, 3.8sec.
650i, 550i, 450i	
Warm-up time*2	17sec, 16 sec, 16 sec.
650i, 550i, 450i	
Imaging technology	Laser
Panel size/resolution	10.1" / 1024 x 600
System memory	8GB
System storage (standard/optional)	256 GB SSD / 1 TB SSD
Interface	10/100/1,000-Base-T Ethernet; USB 2.0;
	Wi-Fi 802.11 b/g/n/ac (optional)
Network protocols	TCP/IP (IPv4 / IPv6); SMB; LPD; IPP; SNMP; HTTP(S); Bonjour
Automatic document feeder	Up to 300 originals; A6-A3; 35-210 g/m ² ; DSDF
ADF double feed detection	Standard
Printable paper size	A6–SRA3; customized paper sizes; banner paper max. 1,200 x 297 mm
Printable paper weight	52-300 g/m ²
Paper input capacity (standard/max)	1,150 sheets / 6,650 sheets
Paper tray input	1x 500; A6-A3; custom sizes; 52-256 g/m ²
	1x 500; A5-SRA3; custom sizes; 52-256 g/m ²

SYSTEM SPECIFICATIONS

Paper feed cabinet (optional)	
PC-216	2x 500 sheets; A5-A3; 52-256 g/m ²
PC-416	1x 2,500 sheets; A4; 52–256 g/m ²
PC-417	1x 1,500 + 1x 1,000 sheets; A5-A4; 52-256 g/m ²
Large capacity unit (optional)	
LU-207	1x 2,500; A4–SRA3; custom sizes; 52–256 g/m ²
LU-302	1x 3,000; A4; 52-256 g/m ²
Manual bypass	150 sheets; A6–SRA3; custom sizes; banner; 60–300 g/m ²
Finishing modes (optional)	Offset; Group; Sort; Staple; Staple (offline); Punch; Half-fold;
	Tri-fold; Booklet; Post insertion; Z-fold
Automatic duplexing	A6-SRA3; 52-256 g/m ²
Output capacity (standard/max)	Up to 250 sheets / up to 3,300 sheets
Stapling (optional)	Max. 100 sheets or 98 sheets + 2 cover sheets (up to 300 g/m^2
Stapling output capacity (optional)	Max. 200 sets
Tri-fold (optional)	Max. 3 sheets
Tri-fold output capacity (optional)	Max. 50 sets; unlimited (without tray)
Booklet (optional)	Max. 20 sheets or 19 sheets + 1 cover sheet (up to 300 g/m ²)
Booklet output capacity (optional)	Max. 35 booklets; unlimited (without tray)
Power consumption	220–240 V / 50/60 Hz; Less than 2.00 kW
System dimension (W x D x H)	615 x 688 x 961 mm (without options)
	615 x 688 x 1207 mm (with PC-416)
System weight	Approx. 98 kg (without options)
	Approx. 122 kg (with PC-416)

NOW YOU CAN MAKE YOUR BUSINESS DEVICES MORE POWERFUL BY SIMPLY ADDING NEW CAPABILITIES.

650i/550i/450i

PRINTER SPECIFICATIONS

Print resolution	1,800 (equivalent) x 600 dpi; 1200 x 1200 dpi
Page description language	PCL 6 (XL3.0); PCL 5c; PostScript 3 (CPSI 3016); XPS
Operating systems	Windows 7 (32/64); Windows 8.1 (32/64); Windows 10 (32/64);
	Windows Server 2008 (32/64); Windows Server 2008 R2;
	Windows Server 2012; Windows Server 2012 R2;
	Windows Server 2016; Windows Server 2019;
	Macintosh OS X 10.10 or later; Unix; Linux; Citrix
Printer fonts	80 PCL Latin; 137 PostScript 3 Emulation Latin
Mobile printing	AirPrint (iOS); Mopria (Android);
	Print Service (Android);
	Mobile Print (iOS/Android/Windows 10 Mobile) WiFi Direct

SCANNER SPECIFICATIONS

Scan speed (mono/colour)	200dpi Simplex, up to 140/140ipm
	200dpi Duplex , up to 280/280ipm
Scan resolution	Up to 600 x 600 dpi
Scan modes	Scan-to-eMail (Scan-to-Me); Scan-to-SMB (Scan-to-Home);
	Scan-to-FTP; Scan-to-Box; Scan-to-USB; Scan-to-WebDAV;
	Scan-to-DPWS; Scan-to-URL; TWAIN scan
File formats	JPEG; TIFF; PDF; Compact PDF; Encrypted PDF; XPS;
	Compact XPS; PPTX
	Optional: Searchable PDF; PDF/A 1a and 1b;
	Searchable DOCX/PPTX/XLSX
Scan destinations	2,000 destinations + 100 groups; LDAP support

COPIER SPECIFICATIONS

Copy resolution	600 x 600 dpi
Gradation	256 gradations
Multicopy	1-9,999
Original format	Max. A3
Magnification	25-400% in 0.1% steps; Auto-zooming

FAX SPECIFICATIONS

Fax standard	Super G3 (Optional)	
Fax transmission	Analogue; i-Fax; Colour i-Fax; IP-Fax	
Fax resolution	Up to 600 x 600 dpi	
Fax compression	MH; MR; MMR; JBIG	
Fax modem	Up to 33.6 Kbps	
Fax destinations	2,000 single + 100 groups	

USER BOX SPECIFICATIONS

Storable documents	Up to 3,000 documents or 10,000 pages
Type of user boxes	Public; Personal (with password or authentication);
	Group (with authentication)
Type of system boxes	Secure print; Encrypted PDF print; Fax receipt; Fax polling
SYSTEM FEATURES	
Security functions	ISO 15408 HCD-PP Common Criteria (in evaluation);
	IP filtering and port blocking; SSL3 and TLS1.0/1.1/1.2 network
	communication; IPsec support; IEEE 802.1x support;
	User authentication; Authentication log; Secure print; Kerberos;
	SSD data encryption (AES 256); Confidential fax; Print user data
	encryption
Security functions (optional)	Antivirus realtime scanning (Bitdefender®);
	Copy protection (Copy Guard, Password Copy)
Accounting	Up to 1,000 user accounts; Active Directory support (user name
	password + e-mail + smb folder); User function access definition
	Authentication by mobile device (Android)
Accounting functions (optional)	ID card authentication (ID card reader);
	Authentication by mobile device (iOS)
Software	Net Care Device Manager; Data Administrator; Box Operator;
	Web Connection; Print Status Notifier; Driver Packaging Utility;
	Log Management Utility

· Not applicable to 650i

 \cdot Warm-up time may vary depending on the operating environment and usage

All specifications refer to A4-size paper of 80 g/m² quality.
 The support and availability of the listed specifications and functionalities varies depending on operating systems,

 The support and availability of the issee Specifications and unclonances varies depending of operating systems, applications and network protocols as well as network and system configurations.
 The stated life expectancy of each consumable is based on specific operating conditions such as page coverage for a particular page size (6% coverage of A4). The actual life of each consumable will vary depending on use and other printing variables including page coverage, page size, media type, continuous or intermittent printing, ambient transport with the super su temperature and humidity.

Some of the product illustrations contain optional accessories.

- Specifications and accessories are based on the information available at the time of printing and are subject to change without notice.

All information stated in the brochure is correct at time of printing and subject to change without notice. _ All brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged.

750i OPTION DESCRIPTIONS

ENHANCED FEATURES

LK-102v3 PDF enhancements	PDF/A(1b), PDF encryption, digital signature
LK-104v3 Voice guidance	Supports voice guidance
LK-105v4 OCR text recognition	Searchable PDF and PPTX
LK-106 Barcode fonts	Supports native barcode printing
LK-107 Unicode fonts	Supports native Unicode printing
LK-108 OCR A and B fonts	Supports native OCR A and B font printing
LK-110v2 Document converter pack	Generates various file formats incl. DOCX, XLSX and PDF/A
LK-111 ThinPrint [®] client	Print data compression for reduced network impact
LK-115v2 Trusted Platform Module	Trusted Platform Module for protection of data encryption and
	decryption
LK-116 Antivirus	Bitdefender® antivirus provides real time scanning of all
	incoming and outgoing data
LK-117 T.38 IP fax	Fax over IP networks (T.38), requires fax kit

CONNECTIVITY	
FK-514 Fax board	Super G3 fax, digital fax functionality
UK-221 Wireless LAN	Wireless LAN and wireless LAN Access Point Mode
EK-608 USB I/F kit	USB keyboard connection
EK-609 USB I/F kit	USB keyboard connection; Bluetooth
ID card reader	Various ID card technologies
MK-735 Mount kit	Installation kit for ID card reader

OTHERS

WT-506 Working table	Authentication device placement
WT-519 Upright Panel	Working table for upright panel
KP-102 10-Key pad	For use instead of touchscreen
IM-102 Intelligent Media Sensor	For detecting types of media
SC-509 Security kit	Copy guard function
EM-908 Replacement SSD	1 TB SSD to increase storage space
KH-102 Keyboard holder	To place USB keyboard
CU-102 Air cleaning unit	Improving indoor air quality by reduced emission

MEDIA INPUT

LU-303 Large capacity tray	3,000 sheets, A4, 52-256 g/m ²
LU-205 Large capacity tray	2,500 sheets, A4-SRA3, 52-256 g/m ²
MK-730 Banner paper guide	Banner paper feeding

MEDIA OUTPUT

OT-514 Output tray	Output tray used instead of finisher
FS-539 Staple finisher	50 sheets stapling; 3,200 sheets max. output
FS-539SD Booklet finisher	50 sheets stapling; 20 sheets booklet finisher; 2,200 sheets max.
	output
PK-524 Punch kit for FS-539/SD	2/4 hole punching; autoswitching
FS-540 Staple finisher	100 sheets stapling; 3,200 sheets max. output
FS-540SD Booklet finisher	100 sheets stapling; 20 sheets booklet finisher; 2,700 sheets
	max. output
PK-526 Punch kit for FS-540/SD	2/4 hole punching; autoswitching
RU-519 Relay unit	For FS-539/SD or FS-540/SD installation
PI-507 Post inserter for FS-540/SD	Cover insertion; post finishing
JS-602 Job separator for FS-540/SD	Separation of fax output; etc.
ZU-609 Z-fold unit for FS-540/SD	Z-fold for A3 prints

TECHNICAL SPECIFICATIONS

SYSTEM SPECIFICATIONS

STOTEM STEENTON TO THOMS	
System speed A4	Up to 75 ppm
System speed A3	Up to 37 ppm
Autoduplex speed A4	Up to 75 ppm
1st page out time A4	2.8sec.
Warm-up time	Approx. 18 sec. ¹
Imaging technology	Laser
Panel size/resolution	10.1″ / 1024 x 600
System memory	8GB
System storage	256 GB SSD / 1 TB SSD
(standard /optional)	
Interface	10/100/1,000-Base-T Ethernet; USB 2.0;
	Wi-Fi 802.11 b/g/n/ac (optional)
Network protocols	TCP/IP (IPv4 / IPv6); SMB; LPD; IPP; SNMP; HTTP(S); Bonjour
Automatic document feeder	Up to 300 originals; A6-A3; 35-210 g/m ² ; DSDF
ADF double feed detection	Standard
Printable paper size	A6-SRA3; customized paper sizes,
	banner paper max. 1,200 x 297 mm
Printable paper weight	52-300 g/m ²
Paper input capacity (standard/max)	3,650 sheets / 6,650 sheets
Paper tray input (standard)	1x 500; A6-A3; custom sizes; 52-256 g/m ²
	1x 500; A5-SRA3; custom sizes; 52-256 g/m ²
	1x 1,500; A5-A4; 52-256 g/m ²
	1x 1,000; A5-A4; 52-256 g/m ²
Large capacity tray (optional)	1x 3,000; A4; 52-256 g/m ²
	1x 2,500; A4–SRA3; custom sizes; 52–256 g/m ²
Manual bypass	150 sheets; A6-SRA3; custom sizes; banner; 60-300 g/m ²
Finishing modes (optional)	Offset; Group; Sort; Staple; Staple (offline); Punch; Half-fold;
	Tri-fold; Booklet; Post insertion; Z-fold

SYSTEM SPECIFICATIONS Automatic duplexing A6-SRA3; 52-256 g/m² Output capacity (standard/max) Up to 200 sheets / up to 3,300 sheets Stapling (optional) Max. 100 sheets or 98 sheets + 2 cover sheets (up to 300 $g/m^2)$ Stapling output capacity (optional) Max. 200 sets Tri-fold (optional) Max. 3 sheets Tri-fold capacity (optional) Max. 50 sets; unlimited (without tray) Booklet (optional) Max. 20 sheets or 19 sheets + 1 cover sheet (up to 300 g/m^2) Booklet output capacity (optional) Max. 35 booklets; unlimited (without tray) 220-240 V / 50/60 Hz; Less than 2.10 kW Power consumption System dimension (W x D x H) 615 x 688 x 1207 mm (without options) System weight Approx. 140.0 kg (without options)

PRINTER SPECIFICATIONS

Print resolution	1,800 (equivalent) x 600 dpi; 1200 x 1200 dpi
Page description language	PCL 6 (XL3.0); PCL 5c; PostScript 3 (CPSI 3016); XPS
Operating systems	Windows 7 (32/64); Windows 8.1 (32/64); Windows 10 (32/64);
	Windows Server 2008 (32/64); Windows Server 2008 R2;
	Windows Server 2012; Windows Server 2012 R2;
	Windows Server 2016; Windows Server 2019; Macintosh OS X
	10.11 or later; Unix; Linux; Citrix
Printer fonts	80 PCL Latin; 137 PostScript 3 Emulation Latin
Mobile printing	AirPrint (iOS); Mopria (Android);
	Print Service (Android);
	Mobile Print (iOS/Android/Windows 10 mobile) WiFi Direct

SCANNER SPECIFICATIONS

Scan speed (mono/colour)	Up to 140/140 ipm in simplex
	Up to 280/280 ipm in duplex
Scan resolution	Up to 600 x 600 dpi
Scan modes	Scan-to-eMail (Scan-to-Me); Scan-to-SMB (Scan-to-Home);
	Scan-to-FTP; Scan-to-Box; Scan-to-USB; Scan-to-WebDAV;
	Scan-to-DPWS; Scan-to-URL; TWAIN scan
File formats	JPEG; TIFF; PDF,Compact PDF; Encrypted PDF; XPS;
	Compact XPS; PPTX
	Optional: Searchable PDF; PDF/A 1a and 1b;
	Searchable DOCX/PPTX/XLSX
Scan destinations	2,000 destinations + 100 groups; LDAP support

COPIER SPECIFICATIONS

Copy resolution	600 x 600 dpi
Gradation	256 gradations
Multicopy	1–9,999
Original format	Max. A3
Magnification	25-400% in 0.1% steps; Auto-zooming

FAX SPECIFICATIONS

Fax standard	Super G3 (optional)
Fax transmission	Analogue; i-Fax; Colour i-Fax; IP-Fax
Fax resolution	Up to 600 x 600 dpi
Fax compression	MH; MR; MMR; JBIG
Fax modem	Up to 33.6 Kbps
Fax destinations	2,000 single + 100 groups

USER BOX SPECIFICATIONS

Storable documents	Up to 3,000 documents or 10,000 pages
Type of user boxes	Public; Personal (with password or authentication);
	Group (with authentication)
Type of system boxes	Secure print; Encrypted PDF print; Fax receipt; Fax polling

SYSTEM FEATURES	
Security	ISO 15408 HCD-PP Common Criteria (in evaluation);
	IP filtering and port blocking;
	SSL3 and TLS1.0/1.1/1.2 network communication; IPsec support;
	IEEE 802.1x support; User authentication; Authentication log;
	Secure print; Kerberos;
	SSD data encryption (AES 256); Confidential fax;
	Print user data encryption
Security functions (optional)	Antivirus realtime scanning (Bitdefender®);
	Copy protection (Copy Guard; Password Copy)
Accounting	Up to 1,000 user accounts;
	Active Directory support (user name + password + e-mail + smb folder)
	User function access definition;
	Authentication by mobile device (Android)
Accounting functions (optional)	ID card authentication (ID card reader);
	Authentication by mobile device (iOS)
Software	Net Care Device Manager; Data Administrator; Box Operator;
	Web Connection; Print Status Notifier; Driver Packaging Utility;
	Log Management Utility

¹ Warm-up time may vary depending on the operating environment and usage

- All specifications refer to A4-size paper of 80 g/m² quality.
- The support and availability of the listed specifications and functionalities varies depending on operating systems, applications and network protocols as well as network and system configurations.
- The stated life expectancy of each consumable is based on specific operating conditions such as page coverage for a
 particular page size (6% coverage of A4). The actual life of each consumable will vary depending on use and other printing variables including page coverage, page size, media type, continuous or intermittent printing, ambient temperature and humidity.

 Some of the product illustrations contain optional accessories.
- Specifications and accessories are based on the information available at the time of printing and are subject to change without notice.
- Ite does not warrant that any specifications mentioned will be error-free.
 All brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged.



+27 11 236 2000 • info@itecgroup.co.za • www.itecgroup.co.za

Document Management



n**t**n