



XM5365

Reliability. Security. Productivity.



XM5365



This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

Lexmark XM5365

Put print speed at up to 61 ppm* in more places with the Lexmark XM5365, the multifunction product with features and performance to satisfy even large workgroups. Robust paper handling technology is designed to make printing more reliable, while long-life imaging components increase uptime and thoughtful engineering enhances serviceability.



Get more done

- ▶ Powerful 1.2-GHz quad-core processor and up to 6 GB of memory drives printing at up to 61 ppm* and scanning at up to 144 sides per minute.
- ▶ Robust paper handling includes reliable feeding of a wide range of media types and sizes and up to 3300 sheets of input.
- ▶ Connect via Ethernet, USB, or simple mobile printing options.

Interact with ease

- ▶ Intuitive 17.8 cm colour touch screen offers smooth, tablet-like interaction with customisable convenience and productivity apps.
- ▶ Front access to the paper path and power button means you'll virtually never have to access the back of the device, allowing placement in or on cabinets.
- ▶ Innovative serviceability features, starting with single-door access to parts and supplies, help you resolve problems quickly.

Ready when you are

- ▶ Long-life fuser and imaging components extend uptime.
- ▶ Unison™ Toner replacement cartridges deliver up to 45,000 pages** of high-quality printing.
- ▶ Steel frame and durable design stands up to heavy use and harsh environments.

Full-spectrum security

- ▶ Lexmark's full-spectrum security architecture helps keep your information safe—in the document, on the device and over the network.
- ▶ Keypoint Intelligence - Buyers Lab honoured Lexmark with a prestigious BLI PaceSetter award for Document Imaging Security***.



Built for planet earth


- ▶ Energy management features reduce power consumption in active use or sleep mode.
- ▶ Standard two-sided printing saves paper.
- ▶ Device is rated EPEAT® Gold and ENERGY STAR® certified.
- ▶ Recycle cartridges through the award-winning Lexmark Cartridge Collection Programme (LCCP).

*Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds.

**Average yield based on approximately 5% print coverage.

***Award based on Western Europe data

Lexmark XM5365

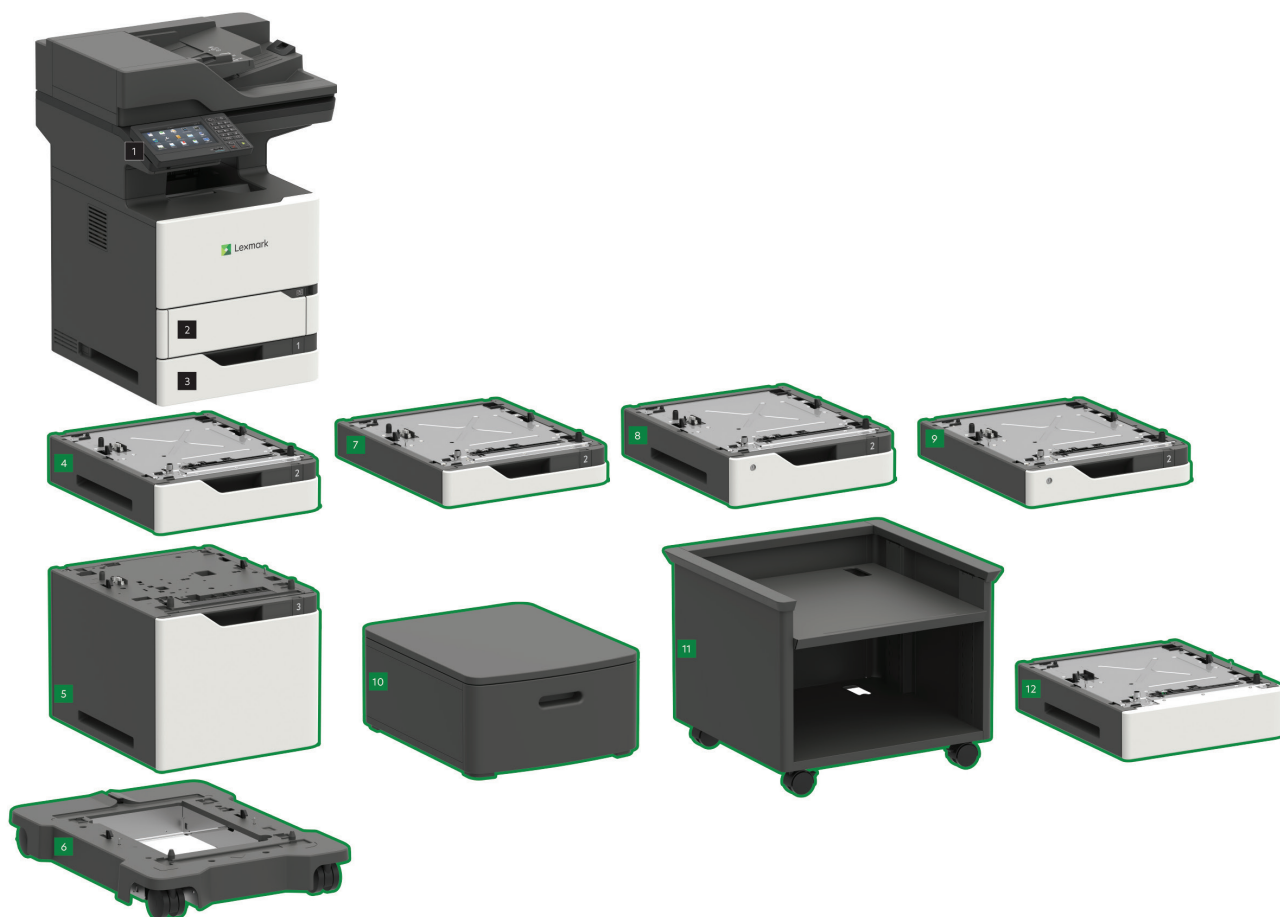

- 1 XM5365 with 17.8 cm class e-Task colour touch screen
29.1 x 22 x 22.8 inches
739.1 x 558.8 x 578.4 mm
- 2 100-sheet multipurpose feeder
Dimensions included as part of base model
- 3 550-sheet tray
Dimensions included as part of base model
- 4 550-sheet tray
4.3 x 16.85 x 20.1 inches
110 x 428 x 510 mm

- 5 2100-sheet tray
13.8 x 16.85 x 20.1 inches
350 x 428 x 510 mm
- 6 Caster base
5 x 20.5 x 27.3 inches
126 x 521 x 693 mm
- 7 250-sheet tray
3.2 x 16.85 x 20.1 inches
80 x 428 x 510 mm
- 8 550-sheet lockable tray
4.3 x 16.85 x 20.1 inches
110 x 428 x 510 mm

- 9 250-sheet lockable tray
3.2 x 16.85 x 20.1 inches
80 x 428 x 510 mm
- 10 Swivel cabinet
10.4 x 18.7 x 23.6 inches
263 x 476 x 600 mm
- 11 Adjustable printer stand
23 x 23.5 x 23.5
584.2 x 596.9 x 596.9
- 12 Spacer to add additional height
4.3 x 16.85 x 20.1 inches
110 x 428 x 510 mm

 Standard
 Optional

Note 1: Supports up to 3 optional 550-sheet trays; OR one optional 550-sheet tray and one optional 2100-sheet tray. For maximum paper input capacity, instal 1 optional 550-sheet tray and one optional 2100-sheet tray. When a 2100-sheet tray is installed, it must be the bottom tray, and a caster base is required.
 Note 2: All measurements are shown as height x width x depth. For more information about supported configurations, refer to the Printer, Option and Stand Compatibility Guide at http://www.lexmark.com/publications/furniture_safety/

© 2018 Lexmark. All rights reserved.

Lexmark, the Lexmark logo and Unison are trademarks of Lexmark International, Inc., registered in the United States and/or other countries. AirPrint® and the AirPrint Logo® are trademarks of Apple, Inc. ENERGY STAR® is a U.S. registered mark. Google Cloud Print™ is a trademark of Google, Inc. MOPRIA®, the Mopria® Logo™ and the Mopria® Alliance logos are trademarks, service marks, and certification marks of Mopria Alliance, Inc. in the United States and other countries. All other trademarks are the property of their respective owners.

This product includes software developed by the OpenSSL Project for use in the Open SSL Toolkit (<http://www.openssl.org/>).

Product specifications		Lexmark MX721ade
Printing		
Display	Lexmark e-Task 7-inch (17.8 cm) color touch screen	
Print Speed: Up to ⁶	Black: 62 ppm	
Time to First Page: As fast as	Black: 4.2 seconds	
Print Resolution	Black: 1200 Image Quality, 1200 x 1200 dpi, 2400 Image Quality, 600 x 600 dpi	
Memory / Processor	Standard: 2048 MB / Maximum: 6144 MB / Quad Core, 1200 MHz	
Hard Disk	Option available	
Recommended Monthly Page Volume ²	5000 - 75000 pages	
Maximum Monthly Duty Cycle: Up to ³	300000 pages per month	
Copying		
Copy Speed: Up to ⁶	Black: 61 cpm	
Time to First Copy: as fast as	Black: 4.2 seconds	
Scanning		
Scanner Type / ADF Scan	Flatbed scanner with ADF / DADF (single pass Duplex)	
A4/Ltr Duplex Scan Speed: Up to	Black: 144 / 150 Sides per minute / Colour: 144 / 150 Sides per minute	
A4/Ltr Simplex Scan Speed: Up to	Black: 72 / 75 Sides per minute / Colour: 72 / 75 Sides per minute	
ADF Paper Input Capacity: Up to	200 pages 75 gsm bond	
Faxing		
Modem Speed	ITU T.30, V.34 Half-Duplex, 33.6 Kbps	
Supplies ⁷		
Laser Cartridge Yields (up to) ¹	7,500-page Cartridge, 35,000-page Extra High Yield Cartridge, 15,000-page Black High Yield Cartridge	
Imaging Unit Estimated Yield: Up to	150000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage	
Cartridge(s) Shipping with Product ¹	11,000-page Starter Return Program Toner Cartridge	
Paper Handling		
Included Paper Handling	550-Sheet Input, 100-Sheet Multipurpose Feeder, 550-Sheet Output Bin, Integrated Duplex	
Optional Paper Handling	250-Sheet Tray, 550-Sheet Tray, 2100-Sheet Tray, 250-Sheet Lockable Tray, 550-Sheet Lockable Tray	
Paper Input Capacity: Up to	Standard: 650 pages 75 gsm bond / Maximum: 3300 pages 75 gsm bond	
Paper Output Capacity: Up to	Standard: 550 pages 75 gsm bond / Maximum: 550 pages 75 gsm bond	
Media Types Supported	Card Stock, Dual Web Labels, Envelopes, Integrated Labels, Paper Labels, Plain Paper, Transparencies, Refer to the Card Stock & Label Guide.	
Media Sizes Supported	10 Envelope, 7 3/4 Envelope, 9 Envelope, A4, A5, B5 Envelope, C5 Envelope, DL Envelope, Executive, Folio, JIS-B5, Legal, Letter, Statement, Universal, Oficio, A6	
General Information ⁴		
Standard Ports	One Internal Card Slot, USB 2.0 Specification Hi-Speed Certified (Type B), Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Two Rear USB 2.0 Specification Hi-Speed Certified ports (Type A)	
Optional Network Ports / Optional Local Ports	Internal MarkNet N8350 802.11b/g/n Wireless, Marknet N8370 WiFi Option / Internal RS-232C serial, Internal 1284-B Bidirectional Parallel	
Noise Level: Operating	Print: 57 dBA / Copy: 60 dBA / Scan: 56 dBA	
Specified Operating Environment	Humidity: 8 to 80% Relative Humidity, Temperature: 10 to 32°C (50 to 90°F), Altitude: 0 - 2896 Meters (9,500 Feet)	
Product Guarantee	1-Year Onsite Service, Next Business Day	
Size (mm - H x W x D) / Weight	739.1 x 558.8 x 578.4 mm / kg: 44.1 kg	

All information in this brochure is subject to change without notice. Lexmark is not liable for any errors or omissions.

This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

¹Average standard page yield value declared in accordance with ISO/IEC 19752. ²"Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³"Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴Printers are sold subject to certain license/agreement conditions. See www.lexmark.com/printerlicense for details. ⁵Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. ⁶Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds. ⁷Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details.



+27 11 236 2000 • info@itecgroup.co.za • www.itecgroup.co.za